




YULAN ELECTRICAL CO., LIMITED

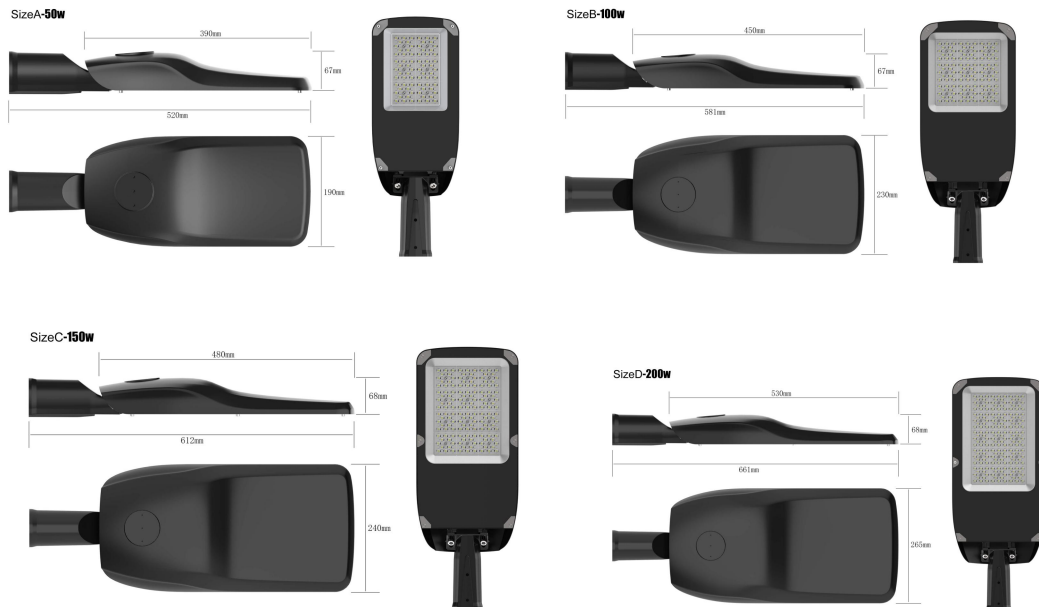

Technical Parameters

Part 1: Basic Electrical Parameters

Power	Input Voltage	Frequency	Power Factor	Lighting Effect	Lighting Effect	CRI
30W-80W	AC100-277V	50/60Hz	>0.95	140-195 lm/W	50000H	>70
100W-120W	AC100-277V	50/60Hz	>0.95	140-195 lm/W	50000H	>70
150W	AC100-277V	50/60Hz	>0.95	140-195 lm/W	50000H	>70
200W	AC100-277V	50/60Hz	>0.95	140-195 lm/W	50000H	>70

Part 2: Environmental & Structure Parameters

Color Temperature	IP Rating	IK Rating	Operation Temp	Storage Temp	Lens Material	Size (mm)
2200K-6500K	IP66	IK08	-30°C~+50°C	-20°C~60°C	PC Lens	520×190×67
2200K-6500K	IP66	IK08	-30°C~+50°C	-20°C~60°C	PC Lens	581×230×67
2200K-6500K	IP66	IK08	-30°C~+50°C	-20°C~60°C	PC Lens	612×240×68
2200K-6500K	IP66	IK08	-30°C~+50°C	-20°C~60°C	PC Lens	661×265×68